

**GESIPA®**

# FireBird®



**The well-proven blind rivet nut setting tool, now with new Li-Ion Energy**

#### FireBird® – High performance

14,4 Volt battery energy for versatile, cablefree operation on building sites or in industry production

#### FireBird® – Safety first

- Drill-on of the blind rivet nut with reduced torque and automatic switch-off
- Triggering the setting process clearly separated from the drill-on action
- Electronic control of the adjusted setting stroke
- Drill-off with high torque
- Sturdy, compact and shockproof tool housing

#### FireBird® – The ergonomomy

- Fatiguefree working through well balanced weight repartition and ergonomic grip
- Easy stroke adjustment

**CE-Conformity:**  
Machine safety acc.  
EU-Directive N° 2006/42/ EG



FireBird® with 14,4 Volt /1,3 Ah battery and charger, in metal carrying case **P/N 726 0032**

#### FireBird® – With new Li-Ion energy

- Choice of 1,3 Ah and 2,6 Ah battery
- No Memory-effect
- High Energy yield through high voltage and low weight allow very easy and fast operation
- Extremely low self discharge
- New battery shape allows the tool to be stored standing on its battery

#### FireBird® – High speed

- Easy and safe drill-on of the blind rivet nut
- Constant setting speed
- Automatic switching from setting to drill-off
- Fast and simple exchange of threaded mandrel

#### FireBird® – Versatility

Blind rivet nuts up to M10 Alu, M8 Steel and M6 Stainless Steel

Authorised UK distributors for:

## The well-proven blind rivet nut setting tool, now with new Li-Ion Energy

### FireBird® – Technical characteristics

Drive:	DC-motor
Setting force:	13.000 N
Max. stroke:	5,5 mm
Weight (incl. 1,3 Ah battery):	2,1 kg (4,63 lbs)


### Batteries

Nominal voltage:	14,4 V
Capacity:	1,3 Ah / 2,6 Ah
Number of cells:	4 / 8
Cell type:	Li-Ion
Weight:	0,35/0,5 kg (0,77/1,1 lbs)
<b>P/N 1,3 Ah battery:</b>	<b>725 1045</b>
<b>P/N 2,6 Ah battery:</b>	<b>725 1049</b>

### Charger

Primary voltage:	230V/50Hz
Charging time:	50 to 100 minutes (acc. to battery type)
Weight:	0,6 kg (1,32 lbs)
<b>P/N</b>	<b>725 1134</b>

### FireBird® – Dimensions

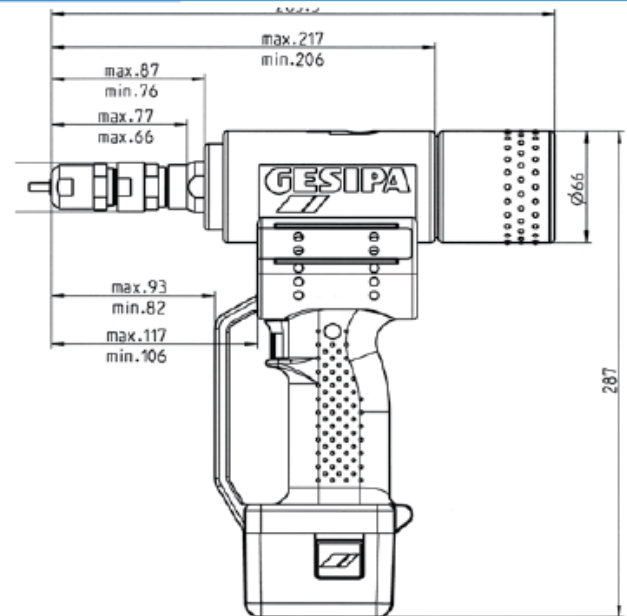

### Typical performance per charge / Treaded mandrels and nosepieces

Blind rivet nut inner thread	Material	approx. pcs/charge (1,3 Ah)	Part Number	
			Mandrel	Nosepiece
M3	Alu	480	726 2019*	726 2086*
M3	Steel/Stainl. Steel	440		
M4	Alu	420	726 2027	726 2094
M4	Steel/Stainl. Steel	380		
M5	Alu	380	726 2035	726 2108
M5	Steel/Stainl. Steel	320		
M6	Alu	320	726 2043	726 2116
M6	Steel/Stainl. Steel	240		
M8	Alu	270	726 2051*	726 2124*
M8	Steel	140		
M10	Alu	240	726 2078*	726 2132*

